



Blister Packing Machine for Ampoule, Vials, Tubes...

Model: Vialvac-II

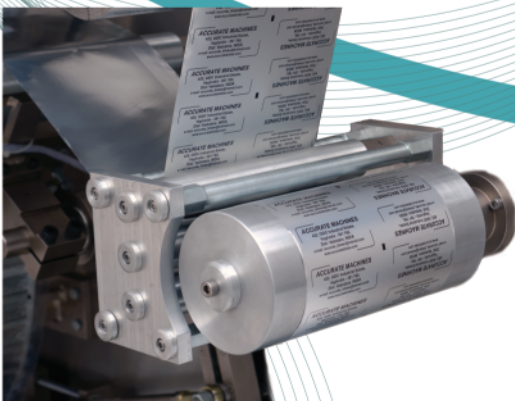

PRC

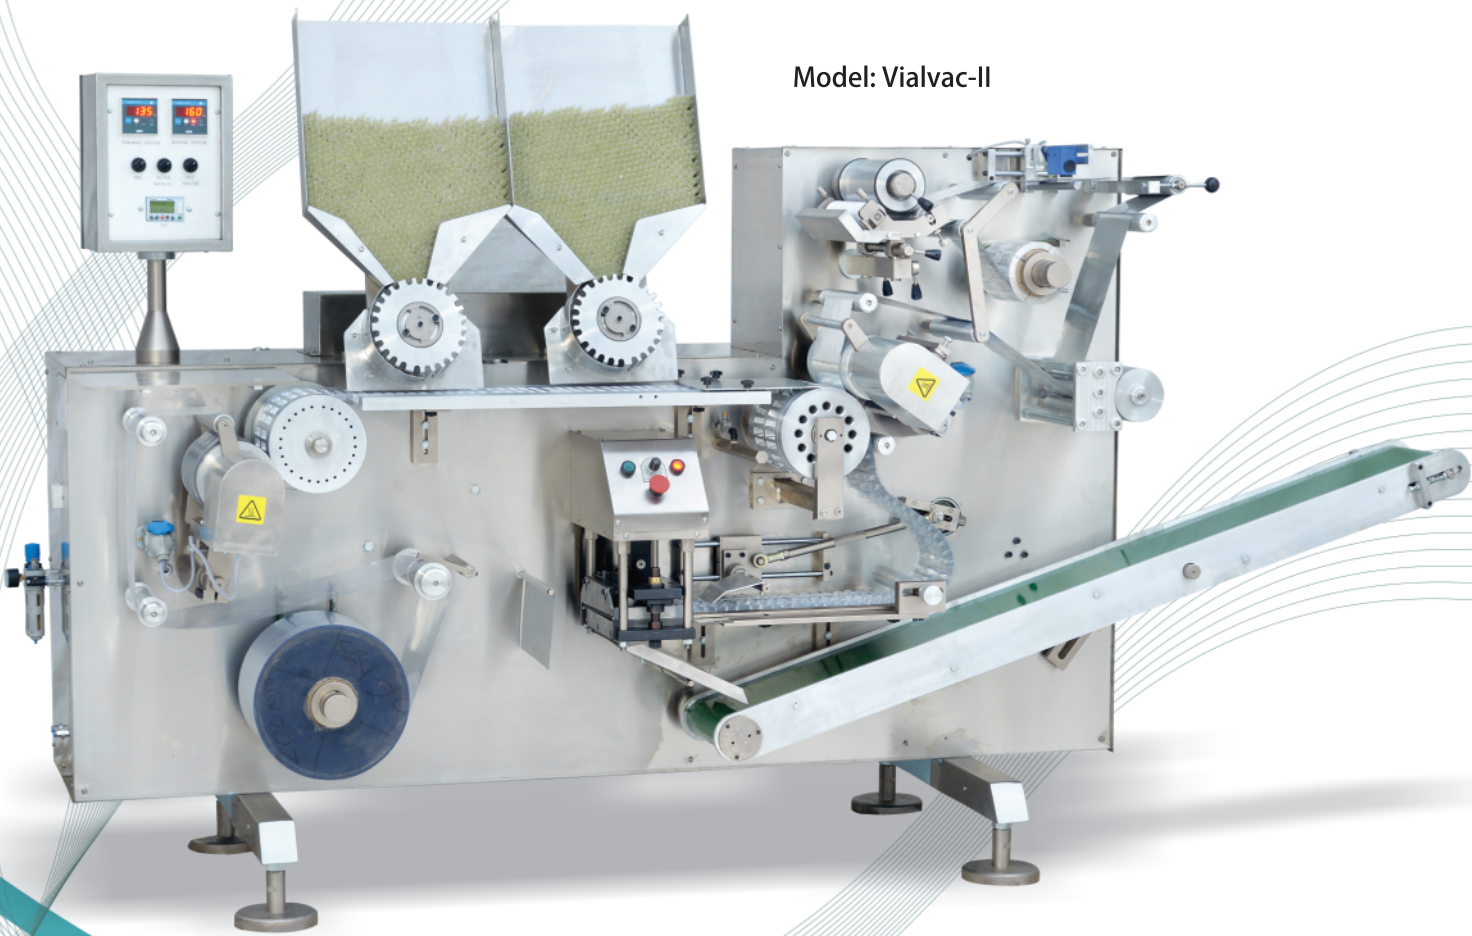

Salient Features

- Feeding System:** Automatic feeding through Teflon coated star wheels.
- Pneumatic Operations:** Festo make for fast response, oil free, minimum wear and tear, easy maintenance and universal availability of bought outs.
- Main Drive:** A.C. Variable frequency drive for speed control.

Packaging Materials

- Base Material** : PVC, PVC/PVDC, PVC/AL/OPA/ACLAR.
- Lidding Material** : Aluminum with heat sealable lacquer or PVDC coating, Glassine paper.

Utilities Requirement

- Compressed Air** 11 CFM Dry air at a Pressure of 8 Kg/Cm²
- Water Cooler** 160 Liters / Hr. Temp. 20 + 2° C
- Electrical Power** 7.5 KW, 415 VAC, 3 Phase + N + E
- Earthing Cable** Copper, 2.5 mm²

Technical specifications

Discription	Model: VIALVAC-II
PVC Base Film Width Max.	210 mm
PVC Film Thickness Max.	0.2 - 0.4 mm
Sealing Foil Width Max.	206 mm
Sealing Foil Thickness Max.	0.02 - 0.04 mm
Pack Length	200 mm
Pack Width	120 mm
Forming Depth	24 mm
Max. Out Put	35 strokes/min.
Approx. Machine Dimensions	With conveyor length: 3100 mm Without conveyor length: 2600 mm Width: 1150 mm Height: 1950 mm
Approx. Net Weight	1200 kgs

N.B.: Due to continuous development and improvement company reserves the right to alter the specifications without prior notice.



ACCURATE MACHINES

422, GIDC Industrial Estate, Waghodia - 391 760, Dist. Vadodara. INDIA
Ph.: (02668) - 262974 Fax : 262119 E-mail: accurate_blister@hotmail.com
www.accurateblister.com