


Blister Packing Machine for PVC / PVDC

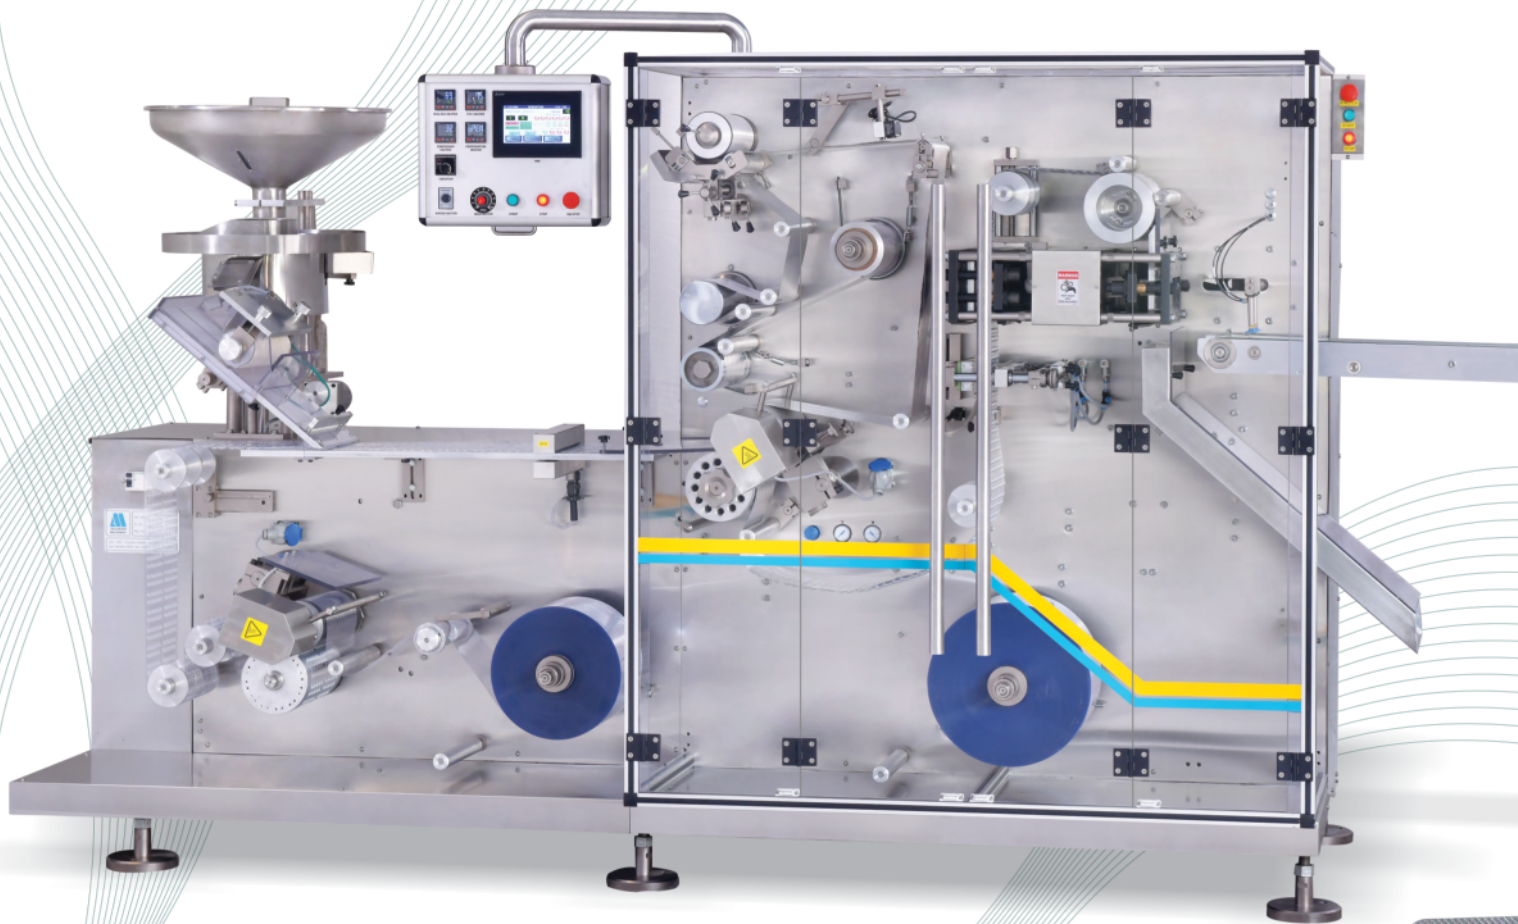

Model: 250EVO


blister packing machines
for form and function

- A.C. Variable frequency drive
- Cross perforation station
- Pick n Place device
- Human Machine Interface (HMI)



Optional Features:

Batch code letter embossing attachment
No fills detection and rejection system
Print registration control for PACK TO PRINT
Cross perforation attachment
Poly-carbonate guard
CE certification

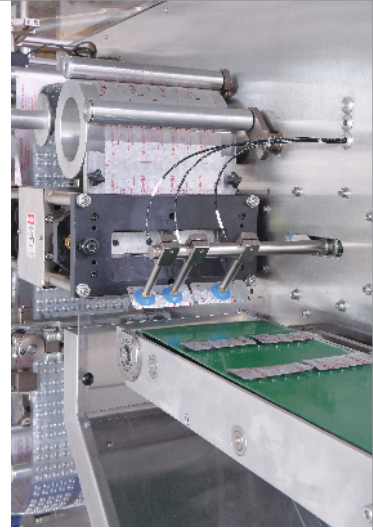

Packaging Materials

Base Material : PVC, PVC/PVDC, PVC/AL/OPA, ACLAR.

Lidding Material : Aluminum with heat sealable lacquer or PVDC coating, Glassine paper.

Utilities Requirement

Compressed Air : 11 CFM dry air having minimum pressure 6 kgs / cm.sq.

Water Cooler : 160 Liters / Hour. Temperature 15°C to 20°C.

Electrical Power : 8.5 KW, 415 VAC, 50 Hz, 3 Phase + N+E.

Earthing Cable : Copper, 2.5 sq. mm

Tech. specs

Discription	Model: 250EVO
PVC Base Film Width Max.	230 mm
PVC Film Thickness Max.	0.20 - 0.35 mm
Sealing Foil Width Max.	226 mm
Sealing Foil Thickness Max.	0.02 - 0.04 mm
Machine Format Area Max.	230mm x 185 mm
Max. Output	35Strokes / Minute
Forming Depth	12 mm
Machine Dimensions in mm	L : 3850 W: 1100 H : 1800



ACCURATE MACHINES

422, GIDC Industrial Estate, Waghodia-391 760, Dist. Vadodara. INDIA
Tel.: +91 (0)2668 - 262974, 262119 Email: info@accurateblister.com

www.accurateblister.com