ANISO 9001-2015 CERTIFIED COMPANY



FLOW WRAP MACHINE







FLOW WRAP MACHINE

STANDARD FEATURES

TECHNICAL SPECIFICATIONS:

Pouch Type : Center Seal Pillow type

Pouch Size Length : 60 to 300mm : 35 to 120mm Width Height : 10 to 70mm

MACHINE SPECIFICATIONS:

Over all Dimensions (LxWxH): 4500 x 1000 x 1700mm (Approx.)

Net Weight: 1000kg. (Approx)

TECHNICAL DATA

Output/min : 100-200-300 Pouches/Min (Output depends

> on dimensions & shape of product, characteristics of packaging material

and operator feeding efficiency)

: Automatic Feeding Feeding System

Pouch Length : Automatic through Servo : Automatic through Servo **Cutting Length** Operating & : Touch Screen HMI with PLC

Control Panel

Temperature Controller : PLC based

Roll width : Maximum width 380 mm.

Minimum width 150 mm.









depending upon product size & packing material).

• Automatic Horizontal Flow Wrap Machine is a versatile


machine, which can wrap cylindrical, cubical and irregular

shaped solid products like I.V. Fluid Bottles / Soap / Bearing

/ Disposable syringe / Pencil Cells / Piston Rings / Spark

Plug / Plastic Spoon / Pre-filled pouches / Scrub pads and

• The machine comes with features like automatic pouch length adjustment mechanism, adjustable forming unit for a wide range of roll width, which ensure short change over times as well as minimum change parts. Machine can be provided with an optional attachment like coding unit, overload clutch etc. (at an extra cost).

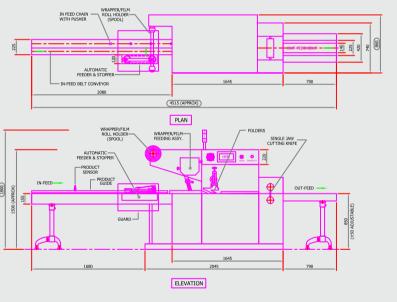


UTILITIES:

Power Consumption: 5 KW. Approx.

: **220/240V AC**, 50Hz, Single Phase **Power Supply**

(Stabilized, Through 1 KVA **CVT = Constant Voltage** Transformer) (In client's scope)





Corporate Office

4, Ruchi, 36, Swastik Society, Navrangpura, Ahmedabad - 380 009. Gujarat. INDIA. Ph: +91 97277 54310 • 92272 85200 Fax: +91-79-2642 5456 E-mail: info@maharshi.com / sales @maharshi.com Website: www.maharshi.com / www.labellingandlabels.com